

Project: _____
 Model #: _____
 Item #: _____ Qty: _____
 Approval: _____

460 Southport Commerce Blvd.
 Spartanburg SC 29306
 Phone: 864-574-6004
 Toll Free: 1-888-532-2816
 sales@ojedausainc.com
 service@ojedausainc.com
 www.ojedausa.com



REFRIGERATED SELF-CONTAINED ISLAND IRMH-60-3-B-H



**Custom Graphics
 Available Upon Request**

R-290 REFRIGERANT

Equipped with R-290 refrigerant, an eco-friendly alternative that meets the EPA's environmental impact regulations.

DOUBLE REFRIGERATION SYSTEM

Double refrigeration system ensures increased reliability, energy efficiency and consistent cooling by providing backup operation and optimizing performance.

120 VOLT SYSTEM

Our island features a 110/120 Volt system for hassle-free plug-and-play and includes a kit for top access, depending on outlet location.

ELECTRONIC CONTROL

The intelligent temperature control is programmed to ensure the correct operation of the equipment.

LED LIGHTING SHELVES

LED provides long lasting energy efficient lighting with minimal heat output.

HOT GAS EVAPORATION

Hot gas heated drain pan for condensate evaporation that eliminates the need of floor drains or electric heaters.

OPERATION TEMPERATURE

Medium Temp: 34°F to 40°F.

Dimensions			Levels	HP	Voltage	NEMA Config	Amps	Crated Weight	Refrigerant
W	D	H							
60.9"	40.7"	63.7"	4	2 x 3/4	120	5-20P	18	624 lbs	R-290
1547 mm	1034 mm	1618 mm	Energy Consumption: 34.5 kWh/24 h						

*Inches rounded up one decimal place. *Specifics may change without notification.

REFRIGERATED SELF-CONTAINED ISLAND

IRMH-60-3-B-H

CABINET CONSTRUCTION

- High-density, CFC-Free, polyurethane insulation.
- Exterior: Galvanized metal cabinet with a powder-coated painted surface and a rounded top made of high-impact polystyrene.
- Interior: Easy to clean pre-painted steel.
- Adjustable leveling leg.

SHELVING

- 4 product levels with 3 shelves.
- Fixed price tag molding.

OPERATING CONDITIONS

- The unit is best suited for an environment where temperatures remain below 75°F and humidity does not exceed 55%.
- Open Air models should not be installed in any area where the air curtain will be disrupted. This includes placement near any HVAC vent, open doorway, fan or areas with direct sunlight.

ELECTRICAL

- 110/120 standard volt system.
- Top-Access connection included.



LIGHTING

- LED lighted shelves.


REFRIGERATION

- R-290 refrigerant.
- Dual refrigeration system.
- Hot gas heated condensation pan.
- Electronic temperature control.
- Automatic defrost cycle.


ACCESSORIES

- 3" or 5" casters.
- Custom graphics available.

SHELF DIMENSIONAL DRAWING

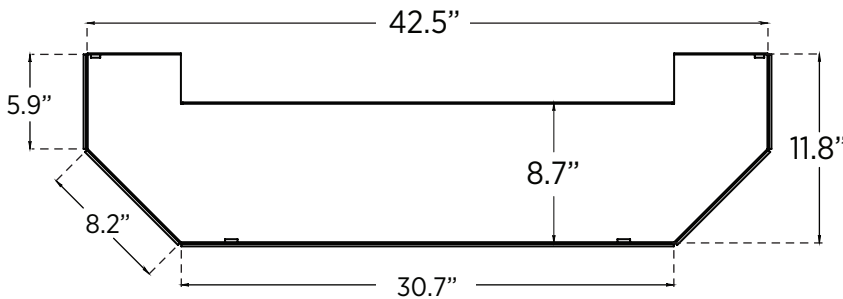

DIMENSIONAL DRAWING

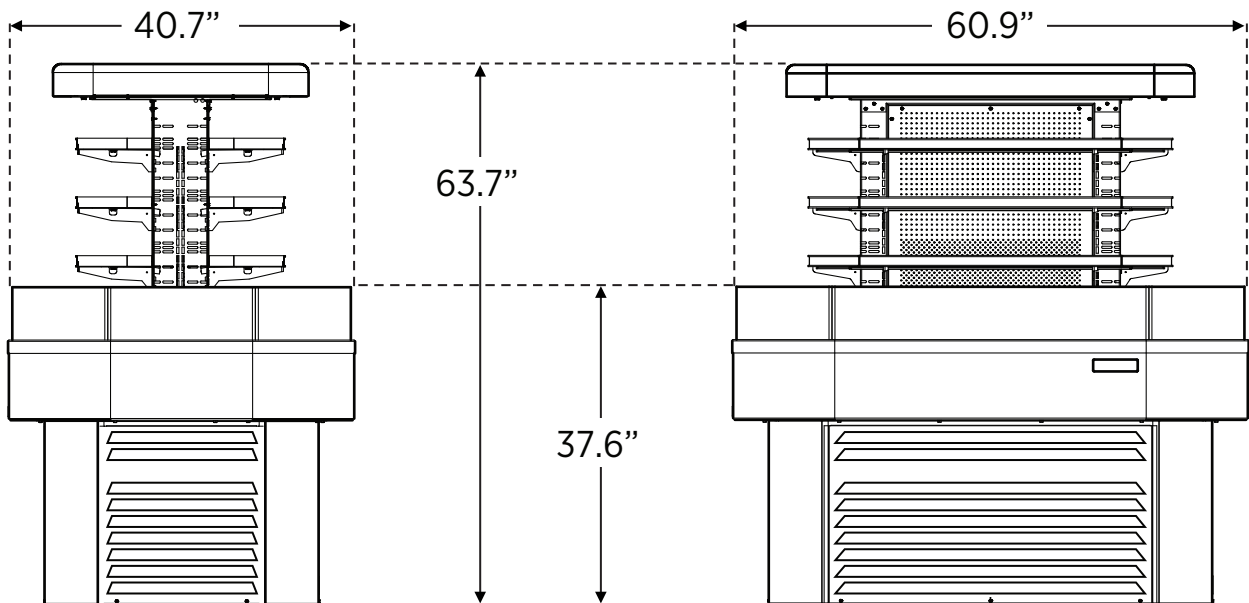

*Inches rounded up one decimal place. *Specifics may change without notification.



www.ojedusa.com